


STANDARD BRICK PAVER CROSS SECTION

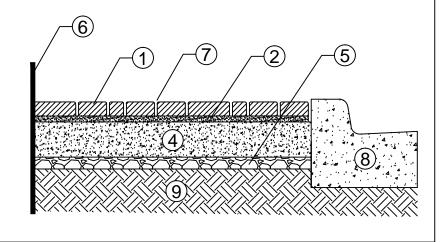

HEAVY DUTY BRICK PAVER CROSS SECTION

MATERIALS

- 1 UNILOCK OR "APPROVED EQUAL" BRICK PAVER (2-3/8")
- ② SAND BEDDING (1")
- (3) COMPACTED GRANULAR BASE ASTM D 2940 (8") W/ 2 LIFTS.
- (4) COMPACTED BITUMINOUS COURSE (12") W/ 3 LIFTS
- (5) COMPACTED GRANULAR BASE * ASTM D 2940 (2")
- 6 VALLEYVIEW T-SHAPE EDGING W/ MAX. SPIKE DISTANCE 8" 10" OR SIDEWALK
- (7) JOINING SAND
- (8) EXISTING CURB & GUTTER
- (9) COMPACTED SUBGRADE
- * COMPACTED GRANULAR BASE SHALL BE VIRGIN CA-6 GRADE 8 OR 9

REVISED K.R.G. 9-11-06



BRICK PAVER CROSS SECTION STANDARD

VILLAGE OF WHEELING SPECIFICATIONS AND DETAILS	REVISIONS	
	S.W.	2-22-07 AUTOCAD FILE
FILE LOCATION		
N:\ENGINEERING\STANDARDS\ ROADWAY		